

Amplifiers

Model 2000S1G2z8

Features:

- 2000 W CW, 1.0 – 2.8 GHz
- Class A design
- 100% mismatch tolerant
- Built-in fault monitoring, logging and protection
- Touch screen display
- RF sample ports with forward and reverse power monitoring
- VSWR monitor with user settable limit
- User settable ALC
- Remote control: Ethernet, USB, GPIB, fiber-optic serial, RS-232
- Modular design for easy maintenance and service
- Low acoustical noise
- 3 Year Warranty

Applications:

- EMC (military, aviation, automotive, commercial)
- Radiated and conducted EMC testing
- General purpose, antenna, and component testing
- 4G LTE, 5G NR (FR1/FR2), OFDM, PSK/QAM, Wi-Fi etc.

To view our full amplifier portfolio visit: www.ar.ametek-cts.com

AR RF/Microwave Instrumentation
160 Schoolhouse Rd
Souderton, PA 18964
215.723.8181
ISO 9001: 2015 Certified
ISO 17025 :2017 Accredited

The Model 2000S1G2z8 is a self-contained, air-cooled, solid-state Class A broadband power amplifier designed for applications demanding wide bandwidth coverage, high gain, and linear performance. It delivers a minimum of 2000 W over a frequency range of 1.0 to 2.8 GHz. The unit includes safeguards against input overdrive beyond 0 dBm, as well as various fault conditions such as excessive temperature and power supply issues.

A scalable, module-based design combined with advanced forced air cooling ensures reliable operation and long-term performance in demanding test environments. A clear front panel display provides immediate visibility of operating status and fault conditions, enabling fast setup and confident operation. For maximum flexibility, all control and monitoring functions can be accessed either locally via the front panel or remotely through a wide range of standard interfaces, including GPIB/IEEE 488, RS 232, fiber optic serial, USB, and Ethernet.

This Class A amplifier is engineered for EMC immunity, communications, and aerospace & defense testing, delivering exceptional stability and linearity under demanding load conditions, including high VSWR, open, or short circuits. Low spurious emissions, high spectral purity, and wideband performance make it ideal for modern wireless and 5G applications.

Export classification for this device is 3A001. These goods, technologies, or software are regulated under U.S. Export Administration Regulations, and unauthorized diversion is prohibited by U.S. law.



Model 2000S1G2z8

- 2000 W
- 1.0 - 2.8 GHz

Electrical Specifications

Parameter	Symbol	Minimum	Typical	Maximum	Unit
Rated Power Output	PSAT	2000	2500	>3000	W
Input for Rated Output	Pin			1.0	mW
				0	dBm
Power Output @ 3 dB Compression	P3dB	1800	2400	>2750	W
Power Output @ 1 dB Compression	P1dB	1500	1800	>2250	W
Operating Frequency	BW	1.0		2.8	GHz
Gain (Small Signal)		67	69	71	dB
Gain Reduction Adjustment (when below compression)		10	12	15	dB
Flatness	ΔG		±1.5	±2.0	dB
Input Impedance	Z in		50		Ohm
			1.5:1	2.0:1	VSWR
Output Impedance	Z out		50		Ohm
3rd Order Intercept	IP3		+70		dBm
Noise Figure	NF		10		dB
Harmonic Distortion @ 1500 W	H2, H3		-30	-20	dBc
Spurious			-73		dBc
Power Consumption	PD			15	kW

Absolute Maximum Rating

Exceeding any of the limits listed here may result in permanent damage to the device.

Parameter	Minimum	Typical	Maximum	Unit
RF Drive		0	+13	dBm
RF Load		1:1	6:1	VSWR
RF Load Reflected Will operate without damage or oscillation when connected to any load impedance or from an open circuit to a short circuit, without the aid of foldback circuitry. However, mismatch above 6:1 may limit output to 1000 watts reflected power.			50	%
AC Power (option 3-Phase, Low Voltage, Delta 4-wire)	200		240	VAC
AC Power (option 3-Phase, High Voltage, Wye 5-wire)	380		415	VAC
AC Power	47	60	63	Hz
Ambient Temperature	+5	+25	+40	°C
Storage Temperature	-20		+50	°C
Altitude			1000	m
Shock/Vibration	Normal Truck Transport			

Model 2000S1G2z8

- 2000 W
- 1.0 - 2.8 GHz

Mechanical Specifications		
Parameters	**Typical**	**Unit**
Dimensions (38U Rack) (W x H x D)	57.3 x 193.8 x 103.1	cm
	22.6 x 76.3 x 40.6	in
Weight	363	kg
	800	lb
Cooling	Forced air (self-contained fans)	
Acoustic Noise Measured @ 1 Meter	70	dBA

Connector Interfaces	
Function	**Type**
RF Input	N, female, rear (50 Ω) (option front)
RF Output	1-5/8 EIA, female, rear (50 Ω)
RF sample	N, female, rear (50 Ω) (63dB typical)
IEEE-488	24-pin
RS-232	9 pin subminiature D
Ethernet	RJ-45
RS-232 (fiber optic)	ST
USB 2.0	Type B
Interlock	15-pin subminiature D
AC Input	5-meter harmonized power cord supplied with amplifier. The power cord is left open-ended to allow for facility power connection of user's choice.

Regulatory Compliance	
Type	**Standard**
EMC	EN 61326-1
Safety	UL 61010-1
	CAN/CSA C22.2 #61010-1
	CENELEC EN 61010-1
RoHS	Directive 2011/65/EU
Export	3A001

Ordering Options

2000S1G2z8	-		-	**N**	-	**R**	-	**158**	-		-	
Model		**RF IN Conn Location, Type**				**RF OUT Conn Location, Type**				**RF Sample Ports**		**Primary Power**

CONNECTOR LOCATION	
Front	F
Rear	R


RF SAMPLE PORTS	
Front	SPF
Rear	SPR

PRIMARY POWER	
200-240 VAC	LV
380-415 VAC	HV


Model 2000S1G2z8

- 2000 W
- 1.0 - 2.8 GHz


Envelope Drawing

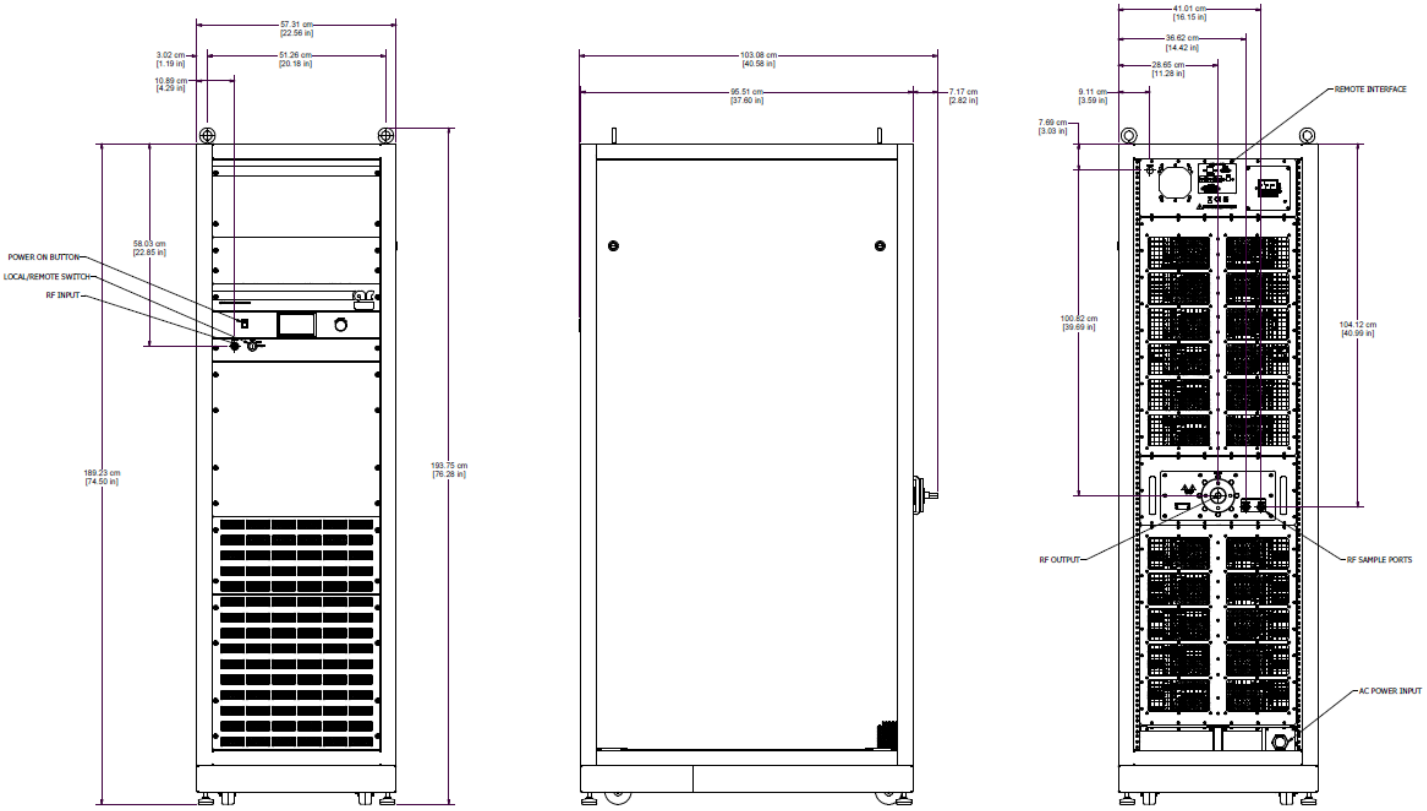


TYPICAL PSAT POWER @ 0 dBm INPUT

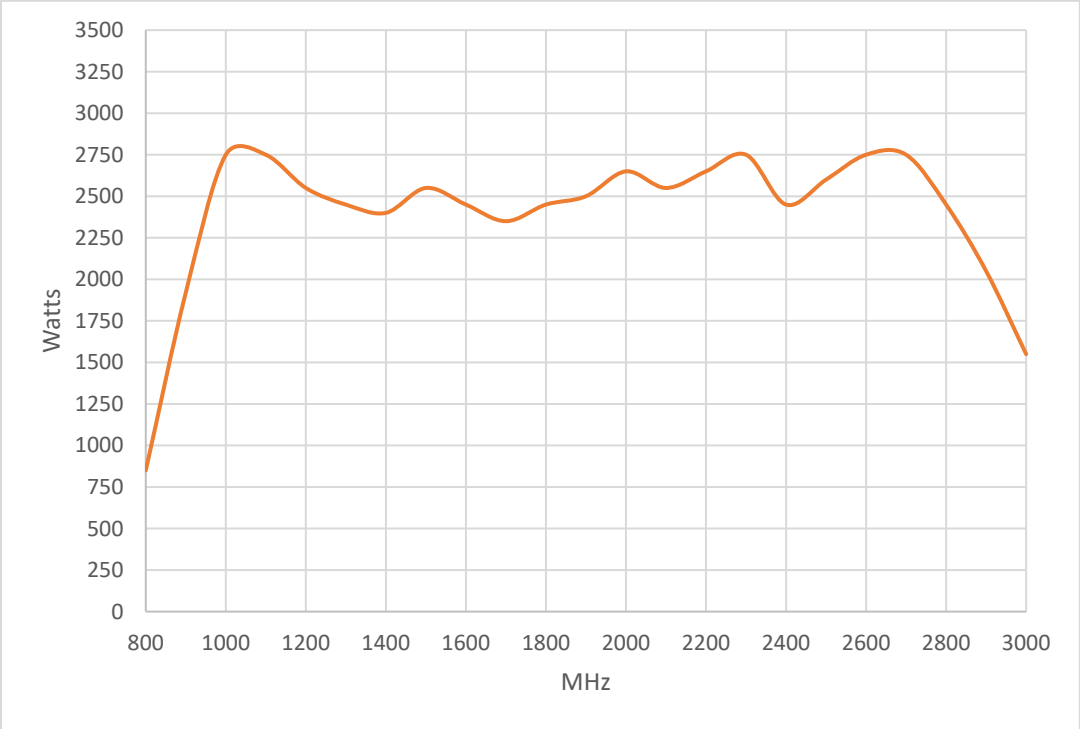


TYPICAL POWER @ P3 dB COMPRESSION

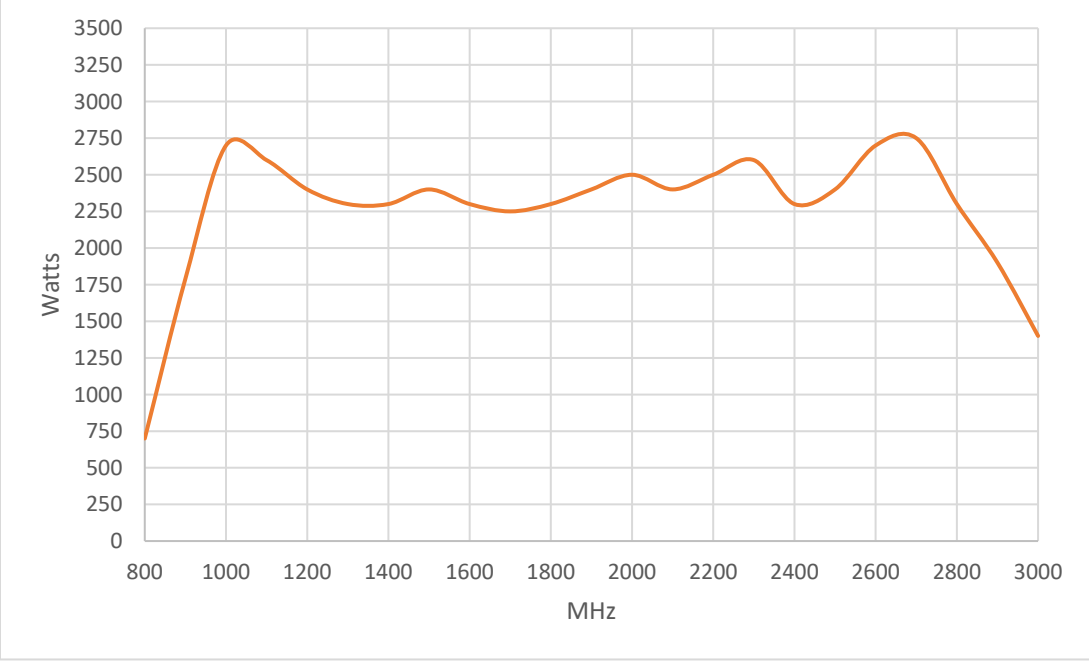


TYPICAL POWER @ P1dB COMPRESSION

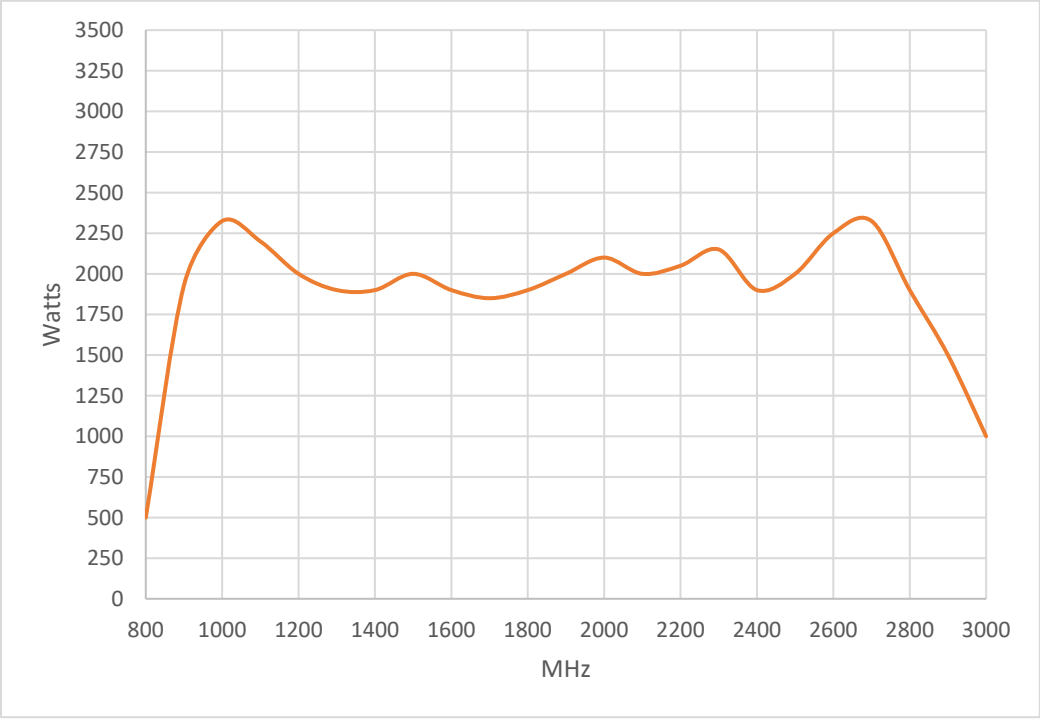


TYPICAL SMALL SIGNAL GAIN @ -20 dBm INPUT

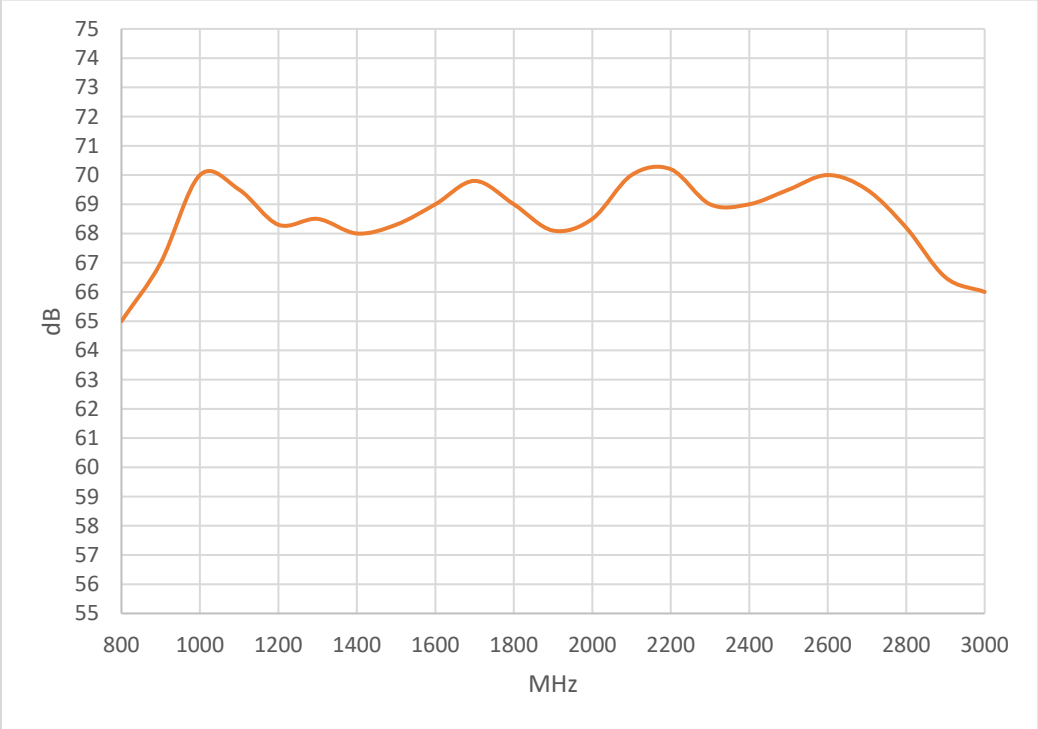

TYPICAL 2ND HARMONIC @ 1500 W

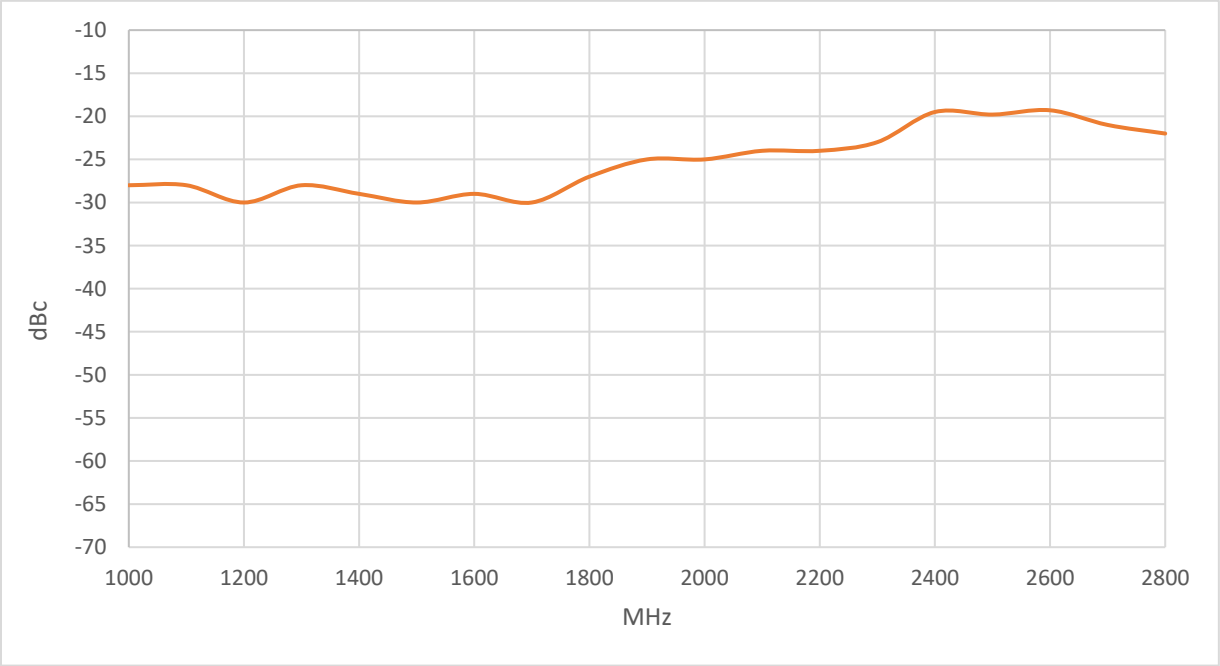


TYPICAL 3RD HARMONIC @ 1500 W

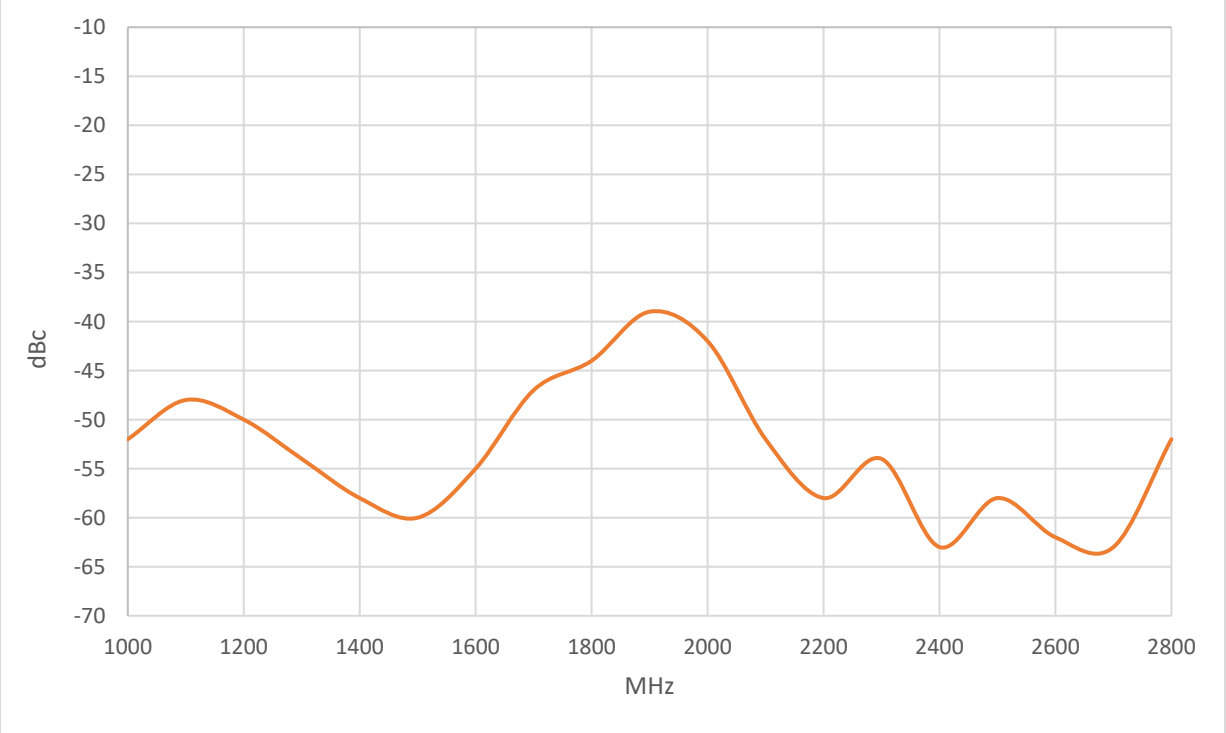

Model 2000S1G2z8

- 2000 W
- 1.0 - 2.8 GHz

TYPICAL INPUT VSWR

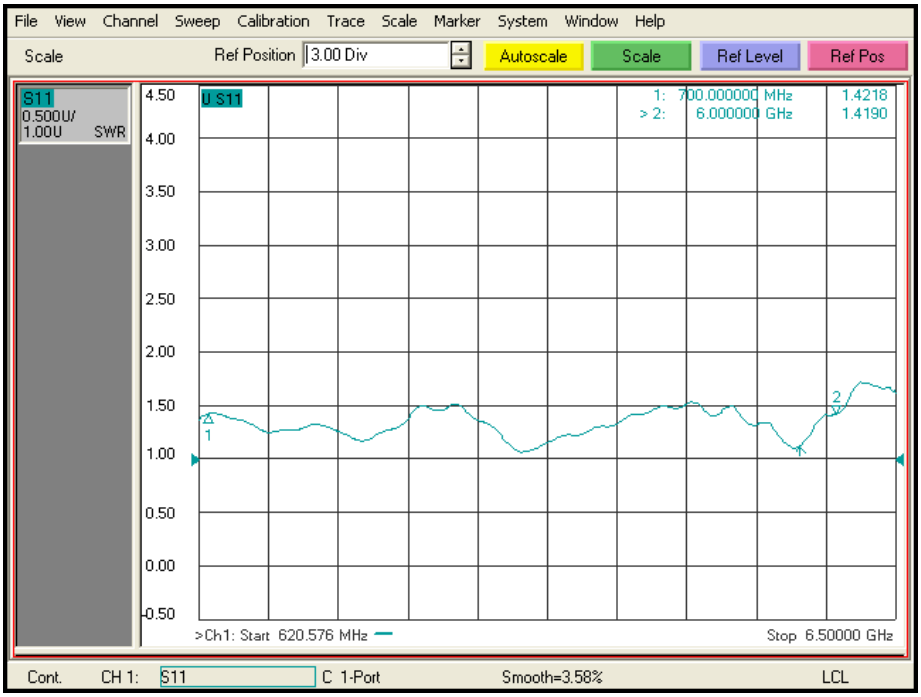

TYPICAL NOISE FIGURE

