

## THE NEW GLOBAL POWER FOR ELECTROMAGNETIC COMPATIBILITY.

THE WORLD'S SPEED IS OUR BEAT



**RF/Microwave Amplifiers** 

## The MILMEGA '80RF' Series Solid State Amplifier Range

Model: 80RF1000-600 Broadband Amplifier




reflected power.

- Colour led bar graph displays on the front panel giving an indication of incident and
- GPIB, RS232, USB and Ethernet remote fitted as standard.
- Unique 5 year parts and labour warranty on all MILMEGA amplifiers.

The 80RF series of solid state power amplifiers follows the MILMEGA tradition for compact, upgradeable microwave power amplifier solutions with field proven reliability. Developed to cover the frequency band 80 - 1000 MHz in a single band.

Designed specifically for EMC testing this mismatch tolerant amplifier delivers continuous power into a poor and variable match typically associated with EMC antenna.

The amplifier, which consists of two 80RF1000-300 sub sections which can be used individually if required, is designed with upgradability in mind. If more power is required this amplifier can be integrated with further additional units to achieve power levels of 1200W P1dB.

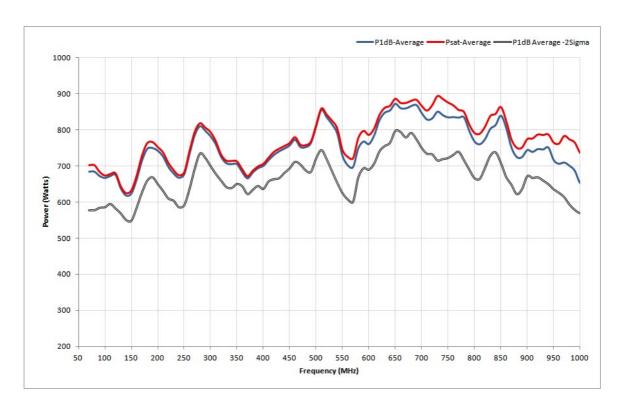

DS80RF1000-600-Issue-1.4 1

## **Amplifier Specification**

80 to 600 MHz	Minimum Psat	Minimum P1dB
Power	575 W	490W
600 to 1000 MHz	Minimum Psat	Minimum P1dB

System Parameters	Nominal	Minimum	Maximum
Harmonics at P1dB	-20 dBc		-15dBc
Gain	63 dB	58dB	70dB
Gain variation with frequency			+/- 3.5 dB
Noise figure	10.0 dB		
Input Power (no damage)			+15 dBm
Output VSWR tolerance	Infinite any phase		
Stability	Unconditional		
Output impedance	50 Ohm		
Output VSWR	2:1		
Input VSWR	2:1		
Third order intercept point IP3	8dB > P1dB		
Spurious	-80 dBc		
Safety interlock	Via rear panel D-sub connector		
Supply Voltage - 3 Phase	Delta or Star		
Supply Frequency	47 to 63 Hz		
Supply Power	<4.2 kVA (typical full power)		
RF Input	Type N female		
RF Output	7/16 female		
Dimension	19 inch, 12U case, 800mm Deep		
Weight	130 kg		

Amplifiers that meet today's and tomorrow's needs through upgradability. Amplifiers in this family include the 80RF1000-175,80RF1000-300,80RF1000-600 and 80RF1000-1200 with the MILMEGA Modularity, Upgrade path and 5 Year Warranty.

Note: Upgrade is only possible up to the highest power model currently available



Specifications subject to change without notice. MILMEGA is an ISO accredited Company. Products are designed and manufactured under strict quality and environmental requirements of ISO 9001.



**RF/Microwave Amplifiers**