

Amplifiers

Model 100A400AM20

Features:

- 100 W CW, 4kHz – 400MHz
- Class A design
- 100% mismatch tolerant
- Built-in fault monitoring and protection
- Remote control: Ethernet, USB, GPIB, fiber-optic serial, RS-232
- Modular design for easy maintenance and service
- Low acoustical noise
- 3 Year Warranty

Applications:

- EMC (military, aviation, automotive, commercial)
- Radiated and conducted EMC testing
- General purpose, antenna, and component testing
- 4G LTE, 5G NR (FR1/FR2), OFDM, PSK/QAM, Wi-Fi etc.
-

To view our full amplifier portfolio visit:
www.ar.ametek-cts.com

AR RF/Microwave Instrumentation
160 Schoolhouse Rd
Souderton, PA 18964
215.723.8181
ISO 9001: 2015 Certified
ISO 17025 :2017 Accredited

The Model 100A400AM20 is a self-contained, air-cooled, solid-state Class A broadband power amplifier designed for applications demanding wide bandwidth coverage, high gain, and linear performance. It delivers a minimum of 100W over a frequency range of 4kHz to 400MHz. The unit includes safeguards against input overdrive beyond 0 dBm, as well as various fault conditions such as excessive temperature and power supply issues.

A scalable, module-based design combined with advanced forced air cooling ensures reliable operation and long-term performance in demanding test environments. A clear front panel display provides immediate visibility of operating status and fault conditions, enabling fast setup and confident operation. For maximum flexibility, all control and monitoring functions can be accessed either locally via the front panel or remotely through a wide range of standard interfaces, including GPIB/IEEE 488, RS 232, fiber optic serial, USB, and Ethernet.

This Class A amplifier is engineered for EMC immunity, communications, and aerospace & defense testing, delivering exceptional stability and linearity under demanding load conditions, including high VSWR, open, or short circuits. Low spurious emissions, high spectral purity, and wideband performance make it ideal for modern wireless and 5G applications.

Export classification for this device is EAR99. These goods, technologies, or software are regulated under U.S. Export Administration Regulations, and unauthorized diversion is prohibited by U.S. law.



- 100 W
- 4kHz – 400MHz

Electrical Specifications					
Parameter	Symbol	Minimum	Typical	Maximum	Unit
Rated Power Output (4kHz – 100kHz)	PSAT	10		>100	W
Rated Power Output (100kHz – 400MHz)	PSAT	100	125	>150	W
Input for Rated Output	Pin			1	mW
				0	dBm
Power Output @ 3 dB Compression (4kHz – 100kHz)	P3dB	10		>100	W
Power Output @ 3 dB Compression (100kHz – 400MHz)	P3dB	100	125	>150	W
Power Output @ 1 dB Compression (4kHz – 100kHz)	P1dB	10		>75	W
Power Output @ 1 dB Compression (100kHz – 400MHz)	P1dB	75	85	>100	W
Operating Frequency	BW	0.004		400	MHz
Gain (Small Signal)			50		dB
Gain Reduction Adjustment (when below gain compression)		20			dB
Flatness @ small signal (-20 dBm input)	ΔG		± 2.0	± 2.5	dB
Input Impedance	Z in		50		Ohm
			1.5:1	2.0:1	VSWR
Output Impedance	Z out		50		Ohm
3 rd Order Intercept	IP3		+55		dBm
Noise Figure	NF		8		dB
Harmonic Distortion @ 75 W	H2, H3			-20	dBc
Harmonic Distortion @ 50 W	H2, H3		-30		dBc
Spurious			-73		dBc
Power Consumption	P _D			500	W

Absolute Maximum Rating

Exceeding any of the limits listed here may result in permanent damage to the device.

Parameter	Minimum	Typical	Maximum	Unit
RF Drive		0	+13	dBm
RF Load		1:1	∞	VSWR
RF Load Reflected Will operate without damage or oscillation when connected to any load impedance without the aid of foldback circuitry.			100	%
AC Power (single phase)	100		240	VAC
AC Power (Three Phase)				
AC Power	47	60	63	Hz
Ambient Temperature	+5	+25	+40	°C
Storage Temperature	-20		+50	°C
Altitude			2000	m
Shock/Vibration	Normal Truck Transport			

Model 100A400AM20

- 100 W
- 4kHz – 400MHz



Mechanical Specifications		
Parameters	Typical	Unit
Dimensions (With Cabinet) (W x H x D)	50.3 x 15.5 x 55.1	cm
	19.8 x 6.1 x 21.7	in
Dimensions (No Cabinet) (W x H x D)	48.3 x 13.2 x 55.1	cm
	19 x 5.2 x 21.7	in
Weight (With Cabinet)	18.5	kg
	41	lb
Weight (No Cabinet)	10.4	kg
	23	lb
Cooling	Forced air (self-contained fans)	
Acoustic Noise Measured @ 1 Meter		dBA

Connector Interfaces	
Function	Type
RF Input	N, female, rear (50 Ω) (option front)
RF Output	N, female, rear (50 Ω) (option front)
IEEE-488	24-pin
RS-232	9 pin subminiature D
Ethernet	RJ-45
RS-232 (fiber optic)	ST
USB 2.0	Type B
Interlock	15-pin subminiature D

Regulatory Compliance	
Type	Standard
EMC	EN 61326-1
Safety	UL 61010-1
	CAN/CSA C22.2 #61010-1
	CENELEC EN 61010-1
RoHS	Directive 2011/65/EU
Export	EAR99

Ordering Options

<u>100A400AM20</u>	-	<u>N</u>	-	<u>N</u>	-	<u>U</u>																				
Model		RF IN Conn Location, Type		RF OUT Conn Location, Type	Enclosure No Enclosure	Remotes No Remotes	Primary Power (Universal)																			
		<table><tr><th colspan="2">Connector</th></tr><tr><td>Front</td><td>F</td></tr><tr><td>Rear</td><td>R</td></tr></table>	Connector		Front	F	Rear	R			<table><tr><th colspan="2">Enclosure</th></tr><tr><td>Enclosure</td><td>E</td></tr><tr><td>No Enclosure</td><td>NE</td></tr></table>	Enclosure		Enclosure	E	No Enclosure	NE			<table><tr><th colspan="2">Remotes Pkg</th></tr><tr><td>Remotes</td><td>R</td></tr><tr><td>No Remotes</td><td>NR</td></tr></table>	Remotes Pkg		Remotes	R	No Remotes	NR
Connector																										
Front	F																									
Rear	R																									
Enclosure																										
Enclosure	E																									
No Enclosure	NE																									
Remotes Pkg																										
Remotes	R																									
No Remotes	NR																									

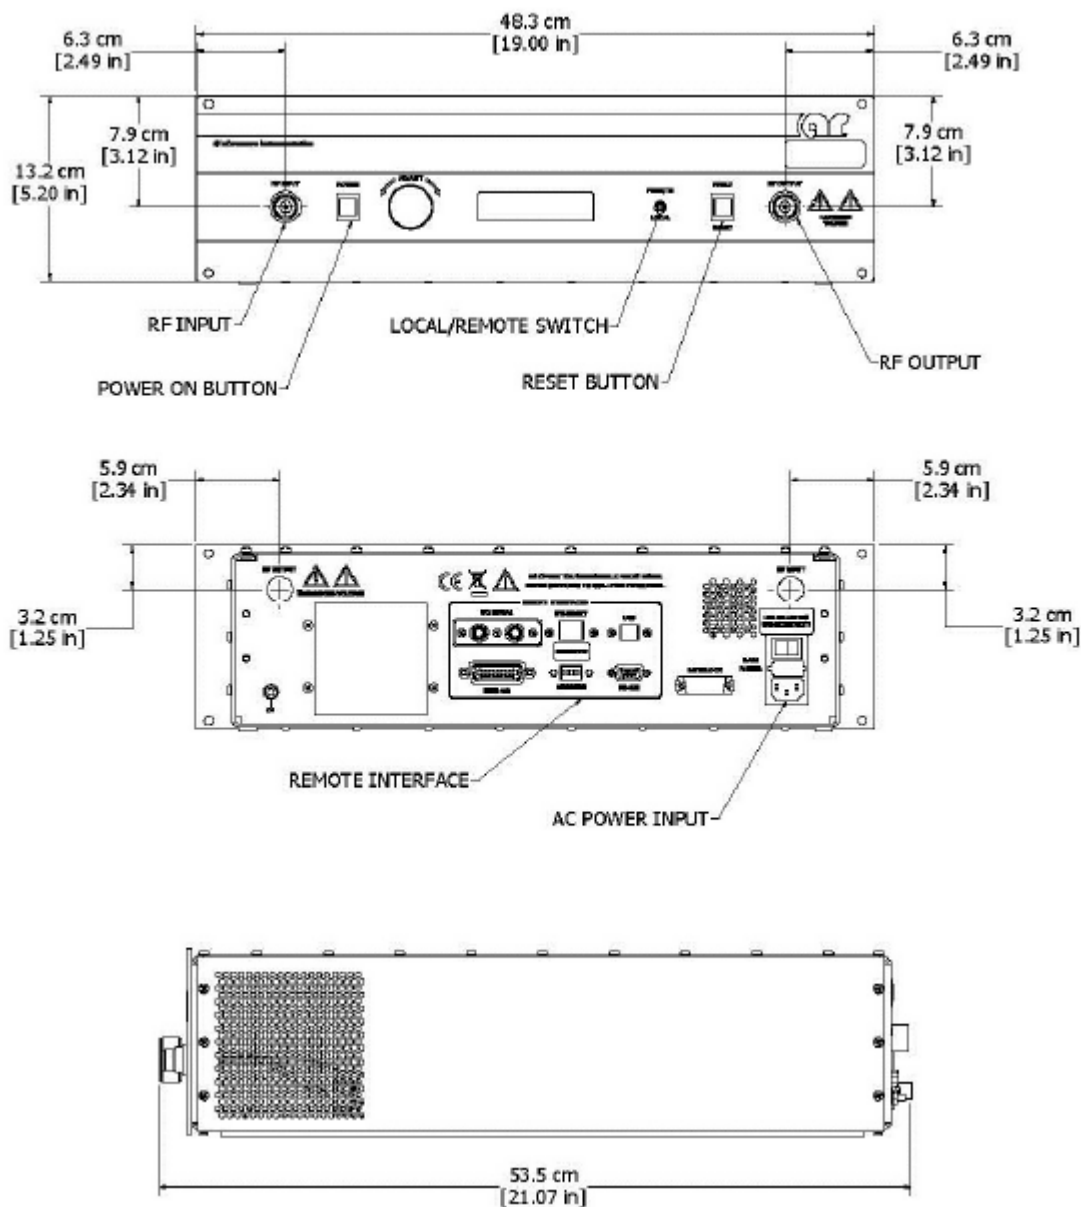


Model 100A400AM20

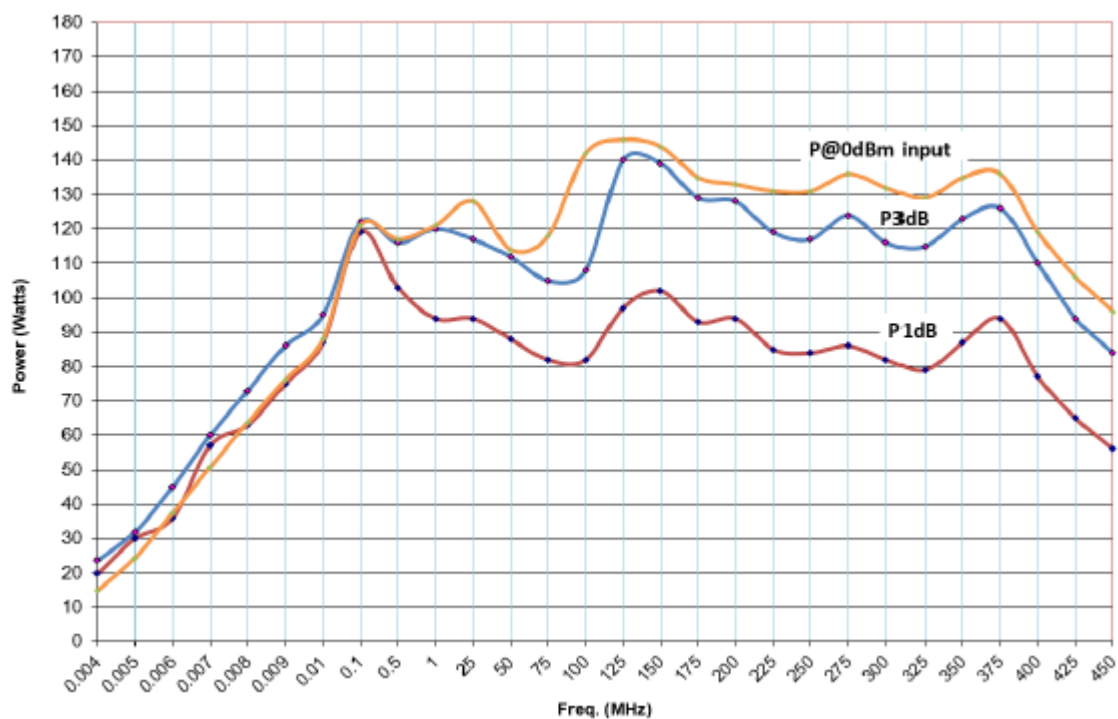
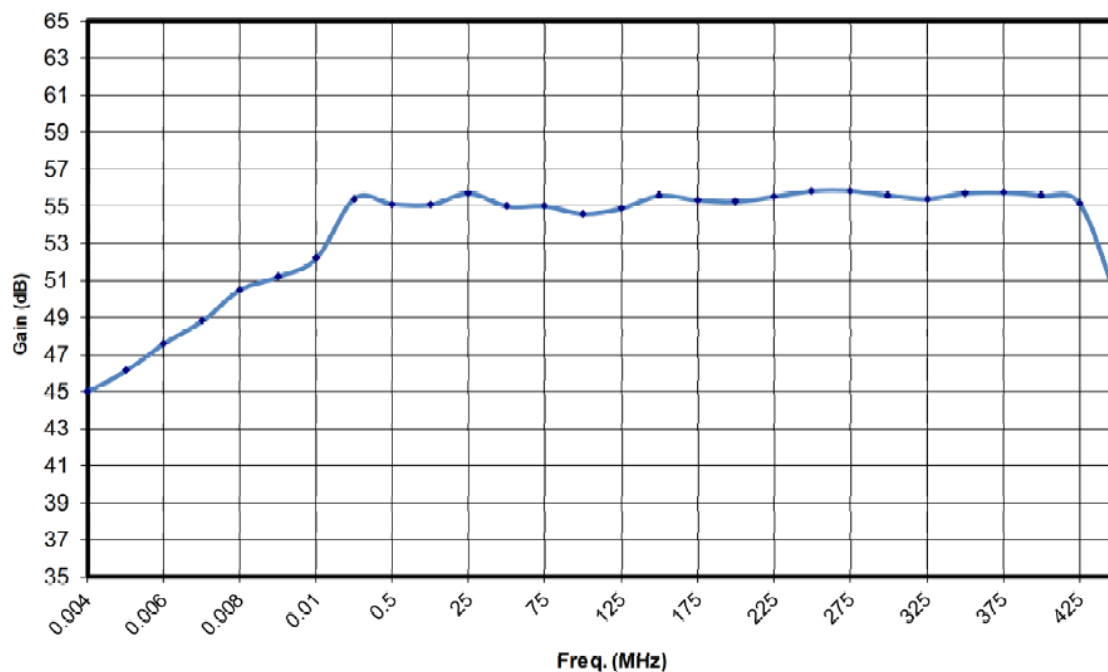
- 100 W
- 4kHz – 400MHz



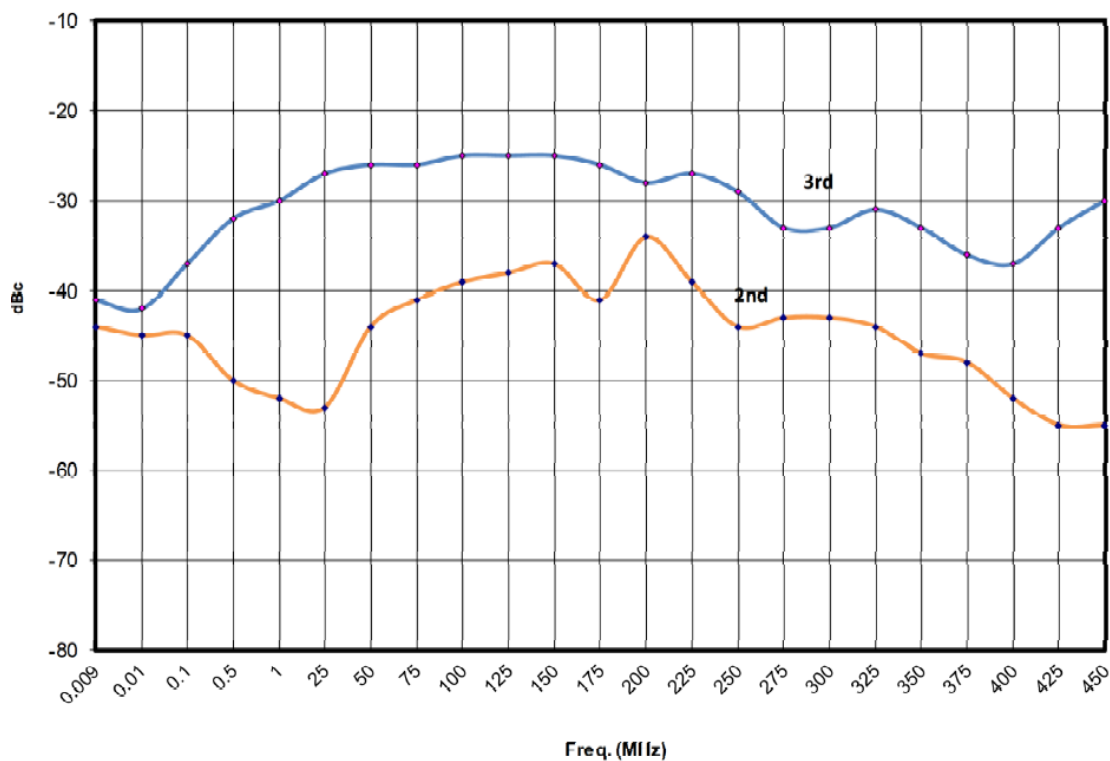
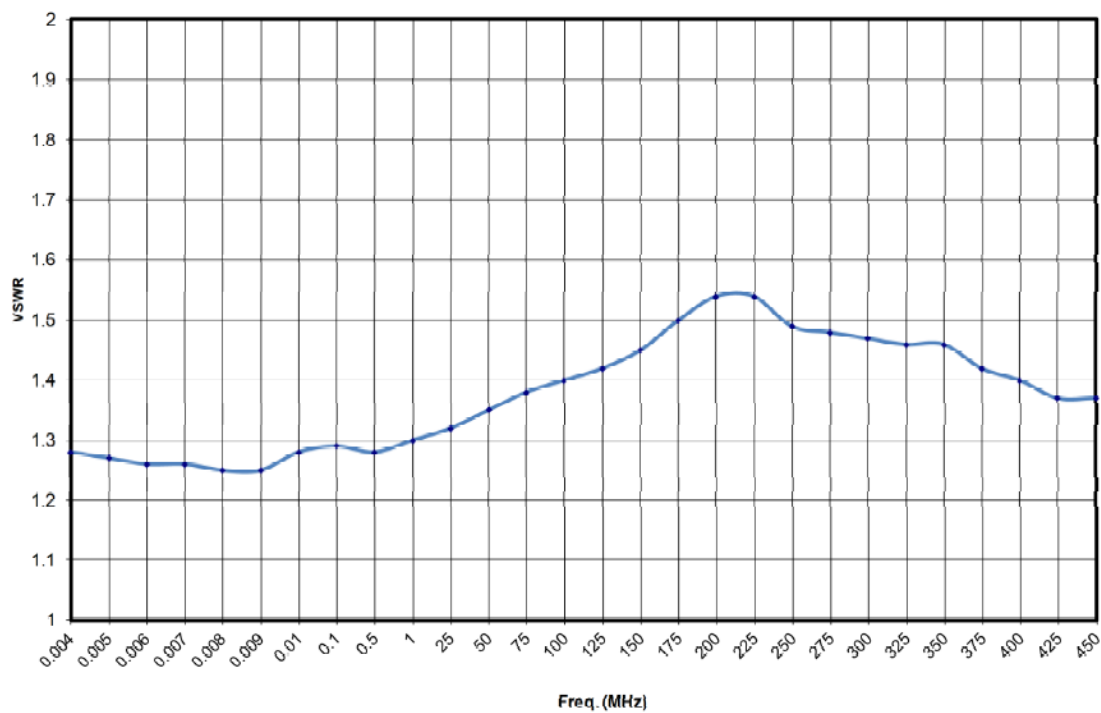
Envelope Drawing



- 100 W
- 4kHz – 400MHz

TYPICAL OUTPUT POWER**TYPICAL SMALL SIGNAL GAIN @ -20 DBM INPUT**

- 100 W
- 4kHz – 400MHz

TYPICAL HARMONICS @ 75 WATTS**TYPICAL INPUT VSWR**

- 100 W
- 4kHz – 400MHz

TYPICAL NOISE FIGURE

